



## FOP-MH

# High-Temperature Pressure Sensor



# DRAFT

The FOP-MH is a fiber optic pressure sensor designed mainly for applications where extreme temperature conditions can be found such as aerospace and defense. It is also a useful tool for general industrial applications in harsh and hazardous environments.

Designed to operate in extreme temperature conditions, where standard sensors fail, the FOP-MH pressure sensor offers immunity to EMI/RFI, a small size, reliable measurement under harsh conditions, high accuracy, resistance to corrosive environments, and high endurance to extreme temperatures.

Research engineers in aerospace, defense, and different industrial areas may now improve process and product technology by monitoring the performance of specific properties over time that will provide accurate information on changes in pressure during the operation, the manufacturing process or throughout the lifetime of a product. The use of the FOP-MH pressure sensor allows a complete pressure analysis in the most challenging environments, especially those characterized by high temperatures.

The FOP-MH fiber optic pressure sensor is based on proven Fabry-Perot interferometer technology. The sensor's unique design is based on deflection measurement of a silicon diaphragm, as opposed to more conventional stress measurement techniques. Pressure creates a variation in the length of the Fabry-Perot cavity and our fiber optic signal conditioners can consistently measure the cavity length with high accuracy under all adverse conditions of temperature, EMI, humidity and vibration. The mechanical robustness is assured by the epoxy-free, all glass construction.

This new pressure sensor provides the industry with better and more reliable pressure measurements for existing applications, and with extended capabilities for new applications requiring high operating temperature ranges.

With a temperature range of up to 300°C (572°F), the FOP-MH fiber optic sensor is ideal for aerospace and defense applications, and any other field where extreme temperature conditions can be found.

### Key Features

- Designed to operate at high temperature conditions, where standard sensors fail.
- Intrinsically safe
- Immune to EMI/RFI
- Up to 300°C (572°F)
- 0 to 1000 psi range

### Applications

- Aerospace
- Defense
- Metallurgy
- Industrial in-situ process monitoring
- High temperature
- Harsh and hazardous environments
- High temperature environments
- Oil well and natural gas pumping station
- Plastic injection molding & extrusion monitoring
- Food packaging

## Specification


**Pressure range** 0–50 psi, 0–150 psi, 0–1000 psi.

Performance	FTI-10, UMI, DMI, Veloce	evolution FPI-HR, FPI-HS
<b>Resolution<sup>1</sup></b>	0.2% of full scale	0.05% of full scale
<b>Accuracy<sup>2</sup></b>	±1.25% of full scale	±0.5% of full scale
<b>Connector type</b>	ST connector	SCAI <sup>3</sup> connector required
<b>Operating temperature</b>	–20°C to +300°C (–4°F to 572°F)	–20°C to +300°C (–4°F to 572°F)

1. Signal conditioner dependent.  
 2. Relative to atmospheric pressure.  
 3. SCAI is a SCA connector with smart chip communicating calibration data to the signal conditioner module



## FOP-MH Dimensions

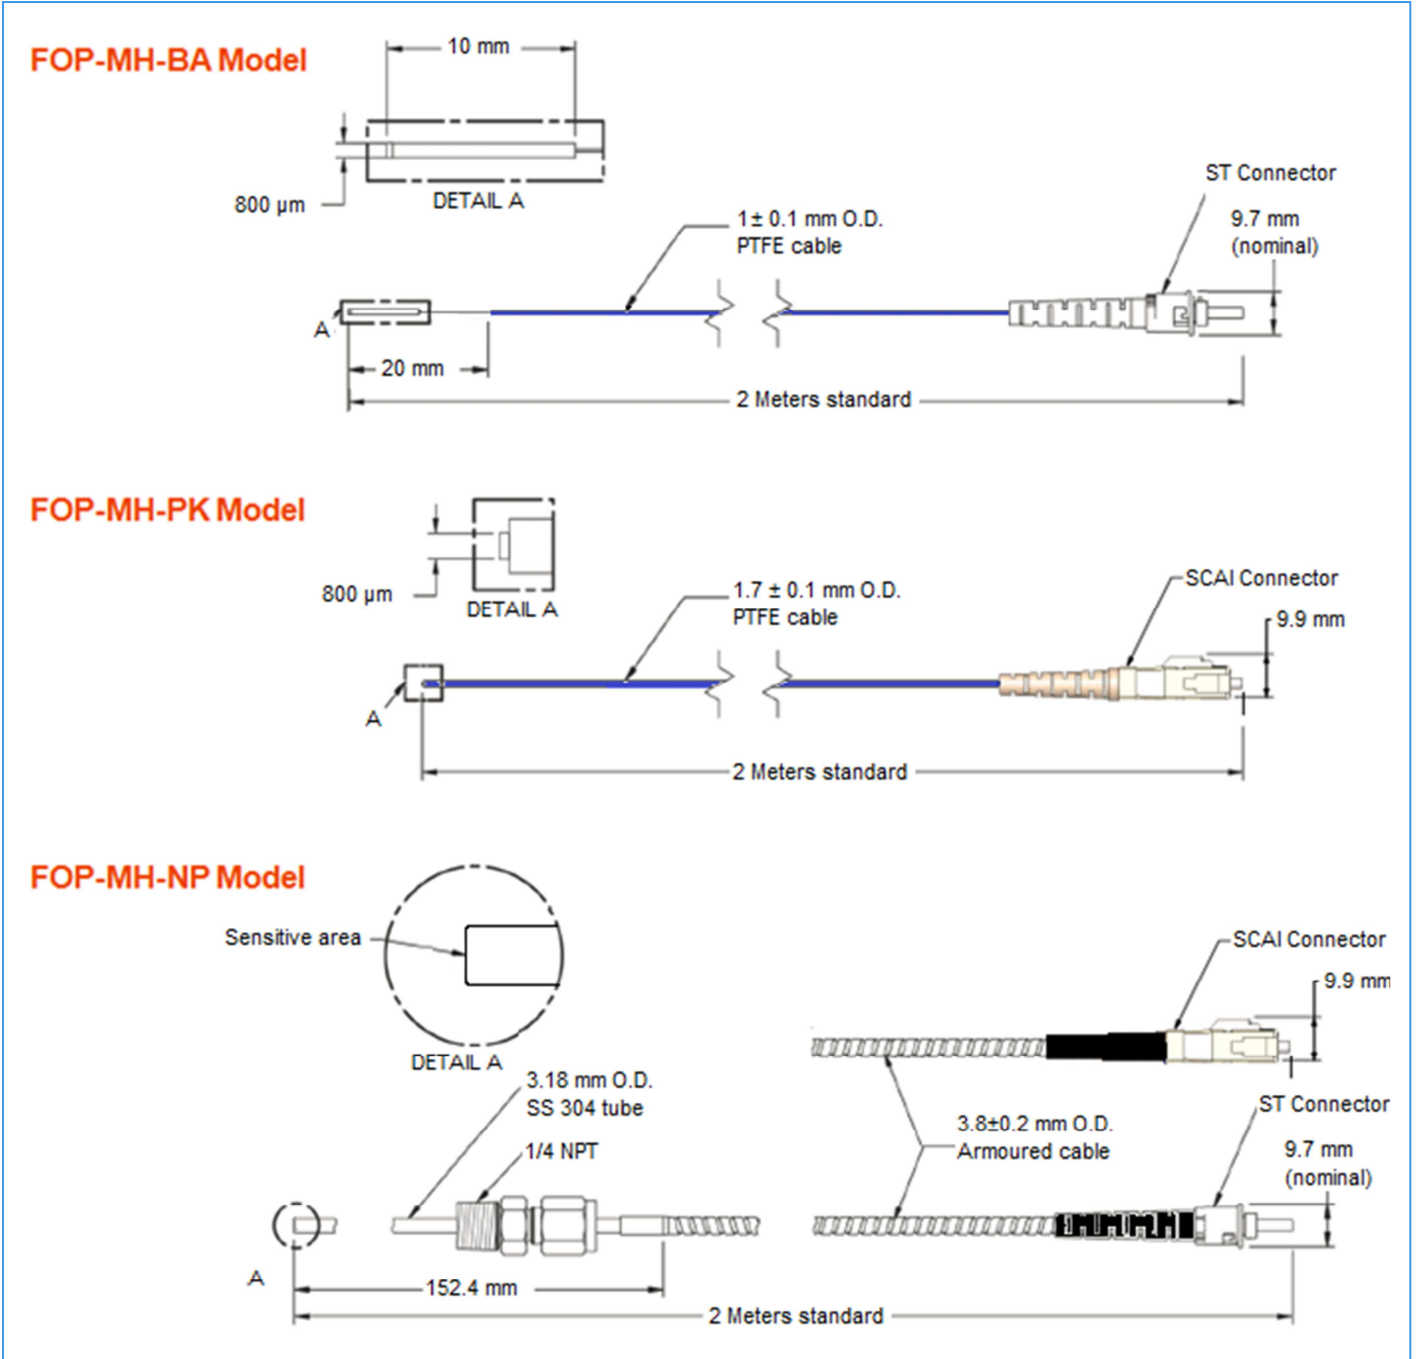

FISO Technologies inc  
 500 St-Jean-Baptiste Ave., Suite 195 Phone +1.418.688.8065 Email [info@fiso.com](mailto:info@fiso.com)  
 Quebec (Quebec) Canada G2E 5R9 Fax +1.418.688.8067 Web [www.fiso.com](http://www.fiso.com)

